

Thank you for purchasing this light fitting. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please retain these instructions for future reference.

Warning:

This is a Class I product and must be earthed.

Please read these instructions carefully before commencing any work.

This unit must be fitted by a competent and qualified electrician.

Install in accordance with IEE Wiring regulations and current Building Regulations.

To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, please consult a qualified electrician.

This light fitting should be connected to a fused circuit.

If replacing an existing fitting, make a careful note of the connections.

This system contains non-replaceable parts and cannot be serviced. If damage occurs the part should be scrapped.

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist.

Check with your local authority or retailer for recycling advice.

This product is rated at IP54.

This product is not suitable for location in or near a marine environment.

This product is not suitable for dimming.

Layout:

- Plan the desired layout of this fitting carefully, ensuring the cables will reach the distance between the junction box and the light fitting.
- Avoid locating any cables in positions that would cause a hazard. Position cables and outdoor rated junction boxes (not supplied) away from areas where they may be at risk from being cut, trapped or damaged.
- We recommend that you use H05RN-F specification cable (not supplied) which is an outdoor grade, rubber sheathed cable. The mains supply cable must have a minimum cross sectional area of 1.0mm²
- Cables must be protected using suitable conduit or plastic trunking.

Installation:

Existing fittings must be completely removed before installation of a new product. Before removing the existing fitting, **carefully note the position of each set of wires.**


1. The product comes with a housing unit that must be fitted into the hole prior to any wiring taking place.
2. Cut the mounting hole for the unit taking care not to damage any pipes or mains cables beneath the mounting surface.

Z001	:	105mm x 32mm cutout	:	75mm void depth
Z002	:	162mm x 53mm cutout	:	75mm void depth
Z003	:	67mm x 62mm cutout	:	75mm void depth

3. Fit the housing into position and secure. This surround may be cemented in position. Wait until the cement has set before continuing with the installation.
4. Push the cable on the product through the hole in the rear of the housing. Pull the cable through to where it is to be terminated.


Wiring:

Having correctly identified the wiring from your light fitting, connect to the approved outdoor rated external terminal block in the following way:

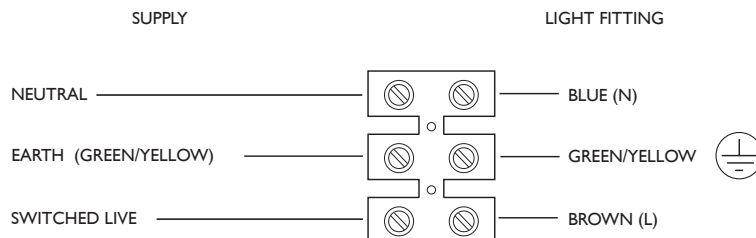

Check that.....

- You have correctly identified the wires.
- The connections are tight.
- No loose strands have been left out of the connection block.
- Reseal the approved outdoor rated external terminal block.

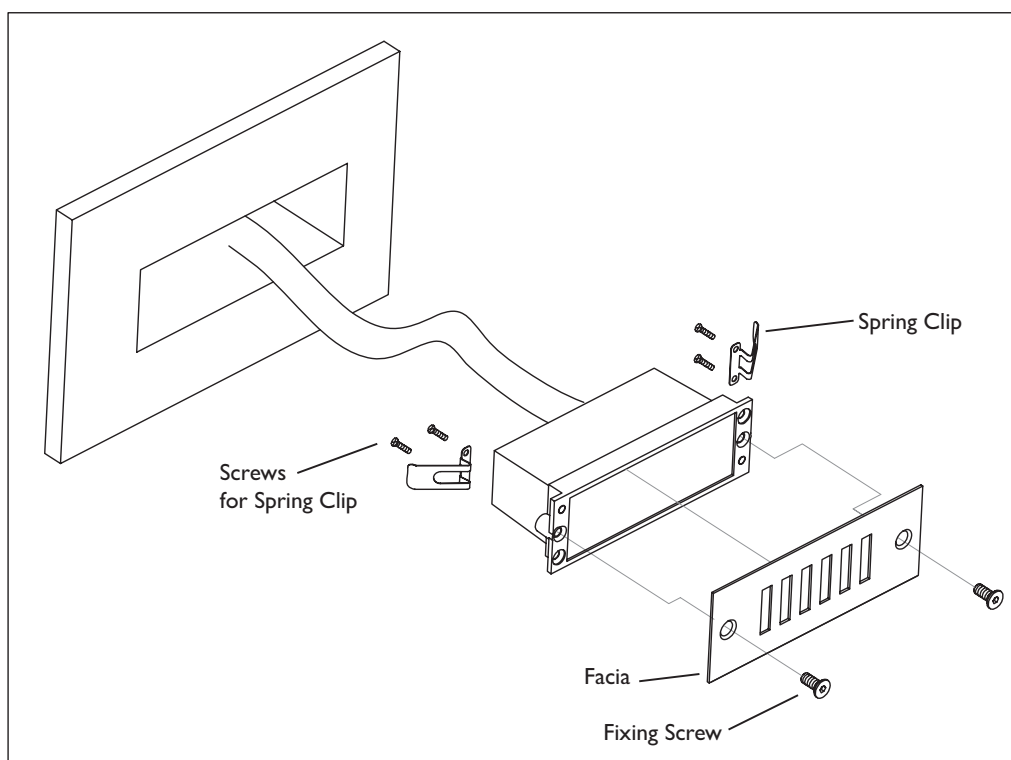


5. Fit the spring clips as shown above, using the supplied screws.
6. Gently push the product into the wall, taking care not to trap any wiring.
7. Replace fuse or circuit breaker and switch on. Your light is now ready for use.
8. It is possible to change the fascia on the unit from the grill style (shown above) to a plain fascia. Undo the two front screws and swap over. Ensure that the seals are correctly located before securing.

Care and Cleaning:

Do not use abrasive materials and cleaners on these products as this may damage the finish.
 Do not clean the units with a pressure washer.
 This system contains non-replaceable parts and cannot be serviced. If damage occurs the part should be scrapped.

Safety Information:

For your safety, always switch off the supply before maintaining the product.



The glass shade must be replaced immediately should the glass shade become cracked or damaged. This fitting must not be used without the glass shade in place.



Saxby Lighting Ltd. Belvue House, Belvue Road, Northolt, Middlesex UB5 5QQ